

10051006


Product Specifications:

1x E26 MAX. 40W TYPE A INCANDESCENT LAMP OR MAX. 15W SBLED LAMP

Voltage: 120VAC Frequency: 60Hz

1 table lamp

Suitable for Dry Locations

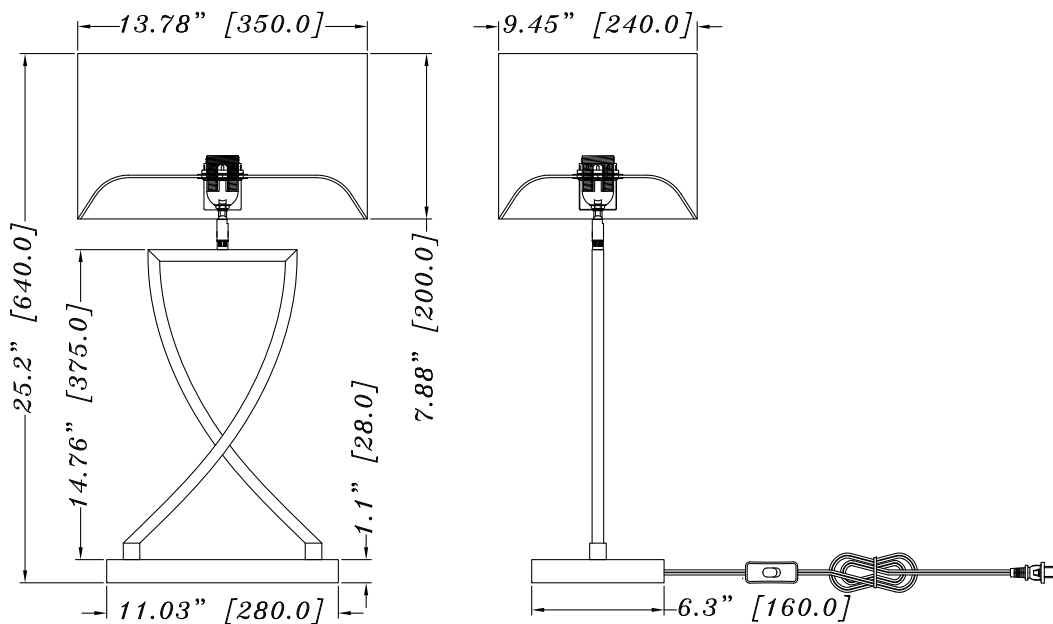

Unit of measure: **inch**

LUQOM Inc. 511 N Boardwalk
1st Floor Rehoboth Beach
Delaware 19971 United States of America

www.Lucande.com

Phone: +1 302 313 0562

Intended use

Provided for portable indoor use

Package contents

1 Lamp
Installation hardware
Mounting instructions
Bulbs not included

Warranty

LIMITED WARRANTY

This product is warranted to be free from defects in workmanship and materials for up to 1 year from date of purchase. If it fails to do so, please contact the Customer Service Team at +1 302 313 0562 or visit www.Lucande.com

Safety Information

For your safety, always remember to:

- Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
- Double-check all connections to be sure they are tight and correct.
- Wear rubber soled shoes and work on a sturdy wooden ladder.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- **WARNING – THIS IS AN ELECTRIC LAMP – NOT A TOY! TO AVOID RISK OF FIRE, BURNS, PERSONAL INJURY AND ELECTRIC SHOCK IT SHOULD NOT BE PLAYED WITH OR PLACED WHERE SMALL CHILDREN CAN REACH IT.**
- **WARNING: RISK OF FIRE/INJURY TO PERSONS.** Keep away from combustibles. Unplug to change bulb. Do not touch bulb.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.

IMPORTANT:

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF THE PLUG DOES NOT FIT IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.



Caution: Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.



Caution: Consult a certified Electrician to ensure correct branch circuit conductor



Caution: RISK OF FIRE. Before installing your lighting fixture, thoroughly review this installation manual. If you do not have sufficient electrical wiring experience have your fixture installed by a certified electrician. All electrical connections must be in accordance with Local and National Electrical Code (NEC) Standards. Reliable operating temperature is -25°C to 45°C.



WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.

NOTICE: All connections must be in accordance with local electrical standards and the National Electrical Code (N.E.C.). Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ITEM NO.:10051006

120V ~ 60Hz
1xE26 max.40W

