


10050979

Product Specifications:

E26 Max. 60W TYPE A INCANDESCENT LAMP OR 15W SBLED LAMP
(per bulb holder)
Voltage: 120VAC Frequency: 60Hz
1 wall lamp
Suitable for Wet Locations

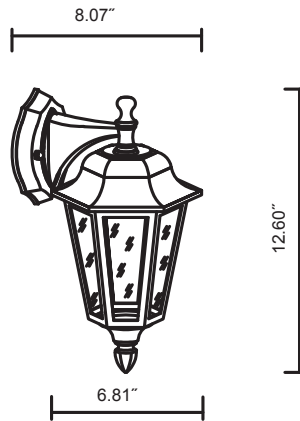

Unit of measure: **inch**

LUQOM Inc. 511 N Boardwalk 1st Floor Rehoboth Beach
Delaware 19971 United States of America

www.Lucande.com

Phone: +1 302 313 0562

Intended use

Provided for fixed outdoor use on walls

Package contents

1 Lamp
Installation hardware
Mounting instructions
Bulbs not included

Outdoor Installation Requirements

1: Use of suitable junction boxes and gaskets (NEC compliant):

- Install fixture to a UL-listed weatherproof junction box suitable for outdoor use.
- Ensure all wiring connections are made inside a weatherproof electrical box.
- Use only listed outdoor-rated junction boxes and fittings.

2: Sealing cable entries for wet locations:

- Seal all openings and conduit entries with approved watertight fittings or silicone sealant to maintain Wet Location rating.
- Apply weatherproof gaskets and tighten all screws to prevent water ingress.
- Ensure all cable entries are properly sealed to comply with Wet Location requirements.

Warranty

LIMITED WARRANTY


This product is warranted to be free from defects in workmanship and materials for up to 1 year from date of purchase. If it fails to do so, please contact the Customer Service Team at +1 302 313 0562 or visit www.Lucande.com

Safety Information

For your safety, always remember to:

- Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
- Double-check all connections to be sure they are tight and correct.
- Wear rubber soled shoes and work on a sturdy wooden ladder.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- OUTDOOR WALL LAMP SUITABLE FOR MOUNTING ABOVE 1.2 m (4 ft) OFF THE GROUND.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.

Qualified electrical or local electrical inspector, and check your local electrical code.			
		Wire	Color
	L	Line (Hot/Live wire)	Black
		Earth conductor (ground)	Green or bare chopper
	N	Neutral	white
	Caution: Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.		
	Caution: Consult a certified Electrician to ensure correct branch circuit conductor		
	Caution: RISK OF FIRE. Before installing your lighting fixture, thoroughly review this installation manual. If you do not have sufficient electrical wiring experience have your fixture installed by a certified electrician. All electrical connections must be in accordance with Local and National Electrical Code (NEC) Standards. Reliable operating temperature is -25°C to 45°C.		
	WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.		
NOTICE: All connections must be in accordance with local electrical standards and the National Electrical Code (N.E.C.). Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.			

